

## 208~230V 8 Way Compact Cassette


### Model:GMV-ND07T/E-T(U)



Specifications	Unit	Parameter
Model	—	GMV-ND07T/E-T(U)
<b>Performance</b>		
Rated Cooling Capacity	kBtu/h	7.5
Rated Heating Capacity	kBtu/h	8.5
Sound Pressure Level	dB(A)	25/31/36
<b>Electrical Data</b>		
Power Supply	Voltage,Phase, Hertz	208/230,1,60
Maximum Overcurrent Protection (MOP)	A	15
Minimum Circuit Amps (MCA)	A	0.7
<b>Fan</b>		
Type x Quantity	—	Centrifugal×1
Air Flow Volume	CFM	220/250/270
Fan Motor Running Current	A	0.5
Fan Motor Power Output	W	53
<b>Refrigerant Piping</b>		
Connection Pipe	Gas(mm/inch)	φ9.52/φ3/8
	Liquid(mm/inch)	φ6.35/φ1/4
Connection method	—	Flare Connection
Refrigerant	—	R410A
<b>Dimension/Weight</b>		
Dimensions (H×W×D)	mm/inch	265×570×570 (10-7/16×22-7/16×22-7/16)
Net Weight	kg/lbs	17.5/38.6
<b>Other</b>		
Safety Certification	—	ETL

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

## Outline and Physical Dimensions of GMV-ND07T/E-T(U).

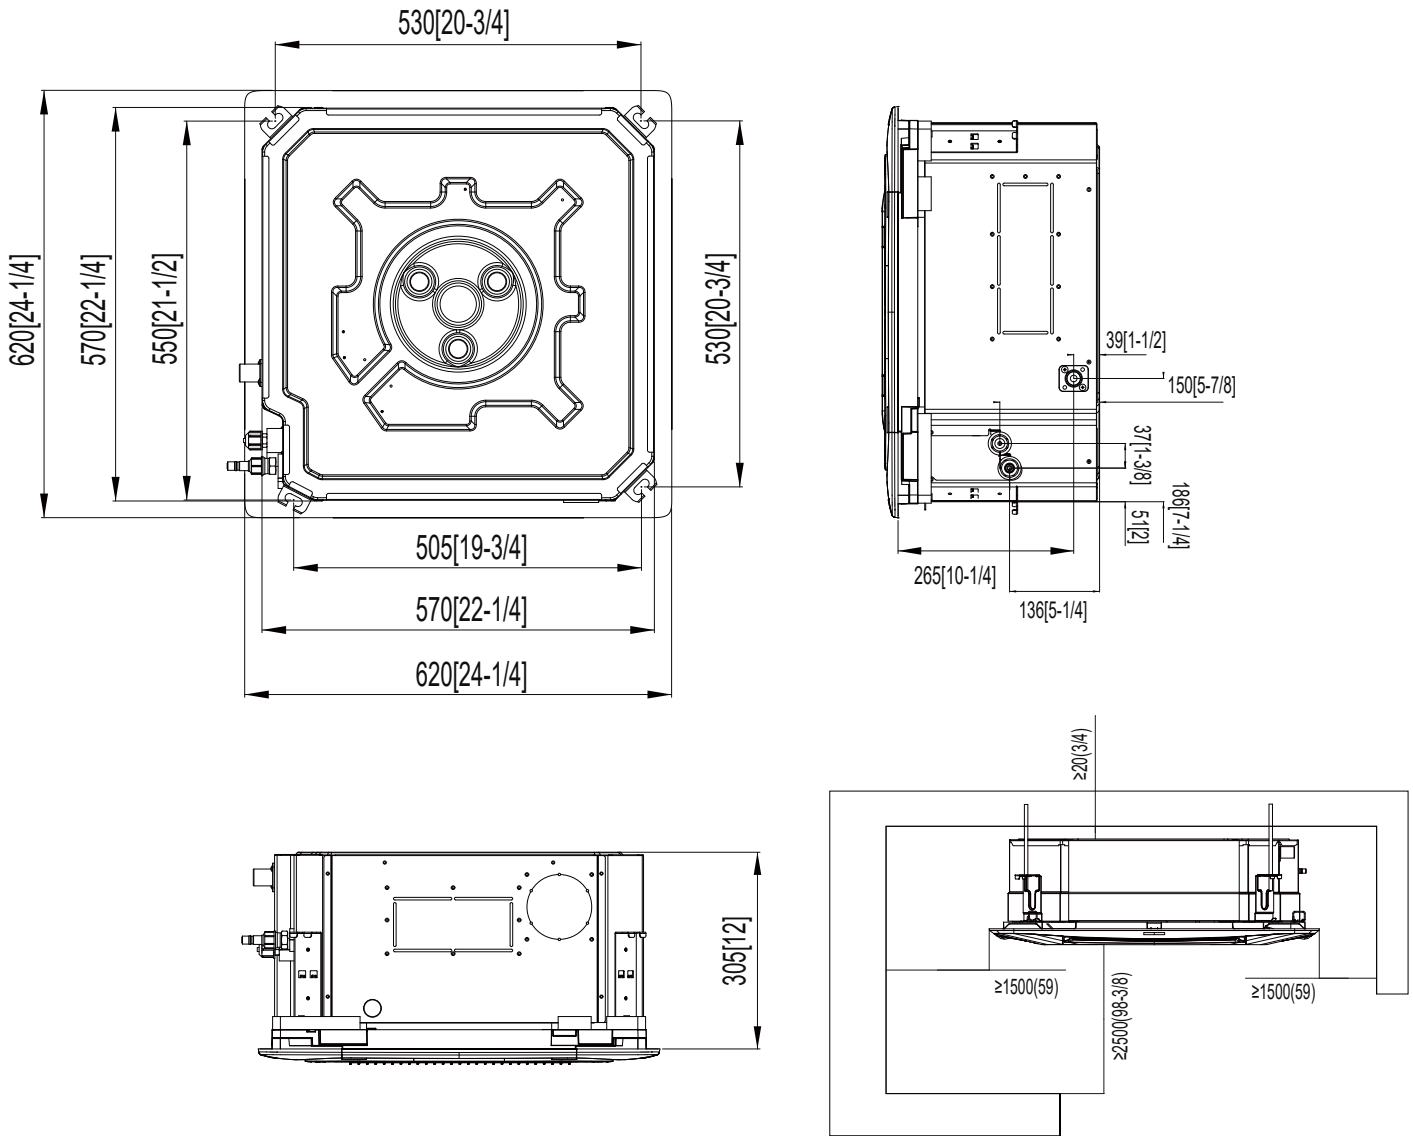

model	H
GMV-ND07T/E-T(U)	280 (11-1/32)

Unit:mm(in.)

